

K

J

H

G

F


E

D

C

B

A

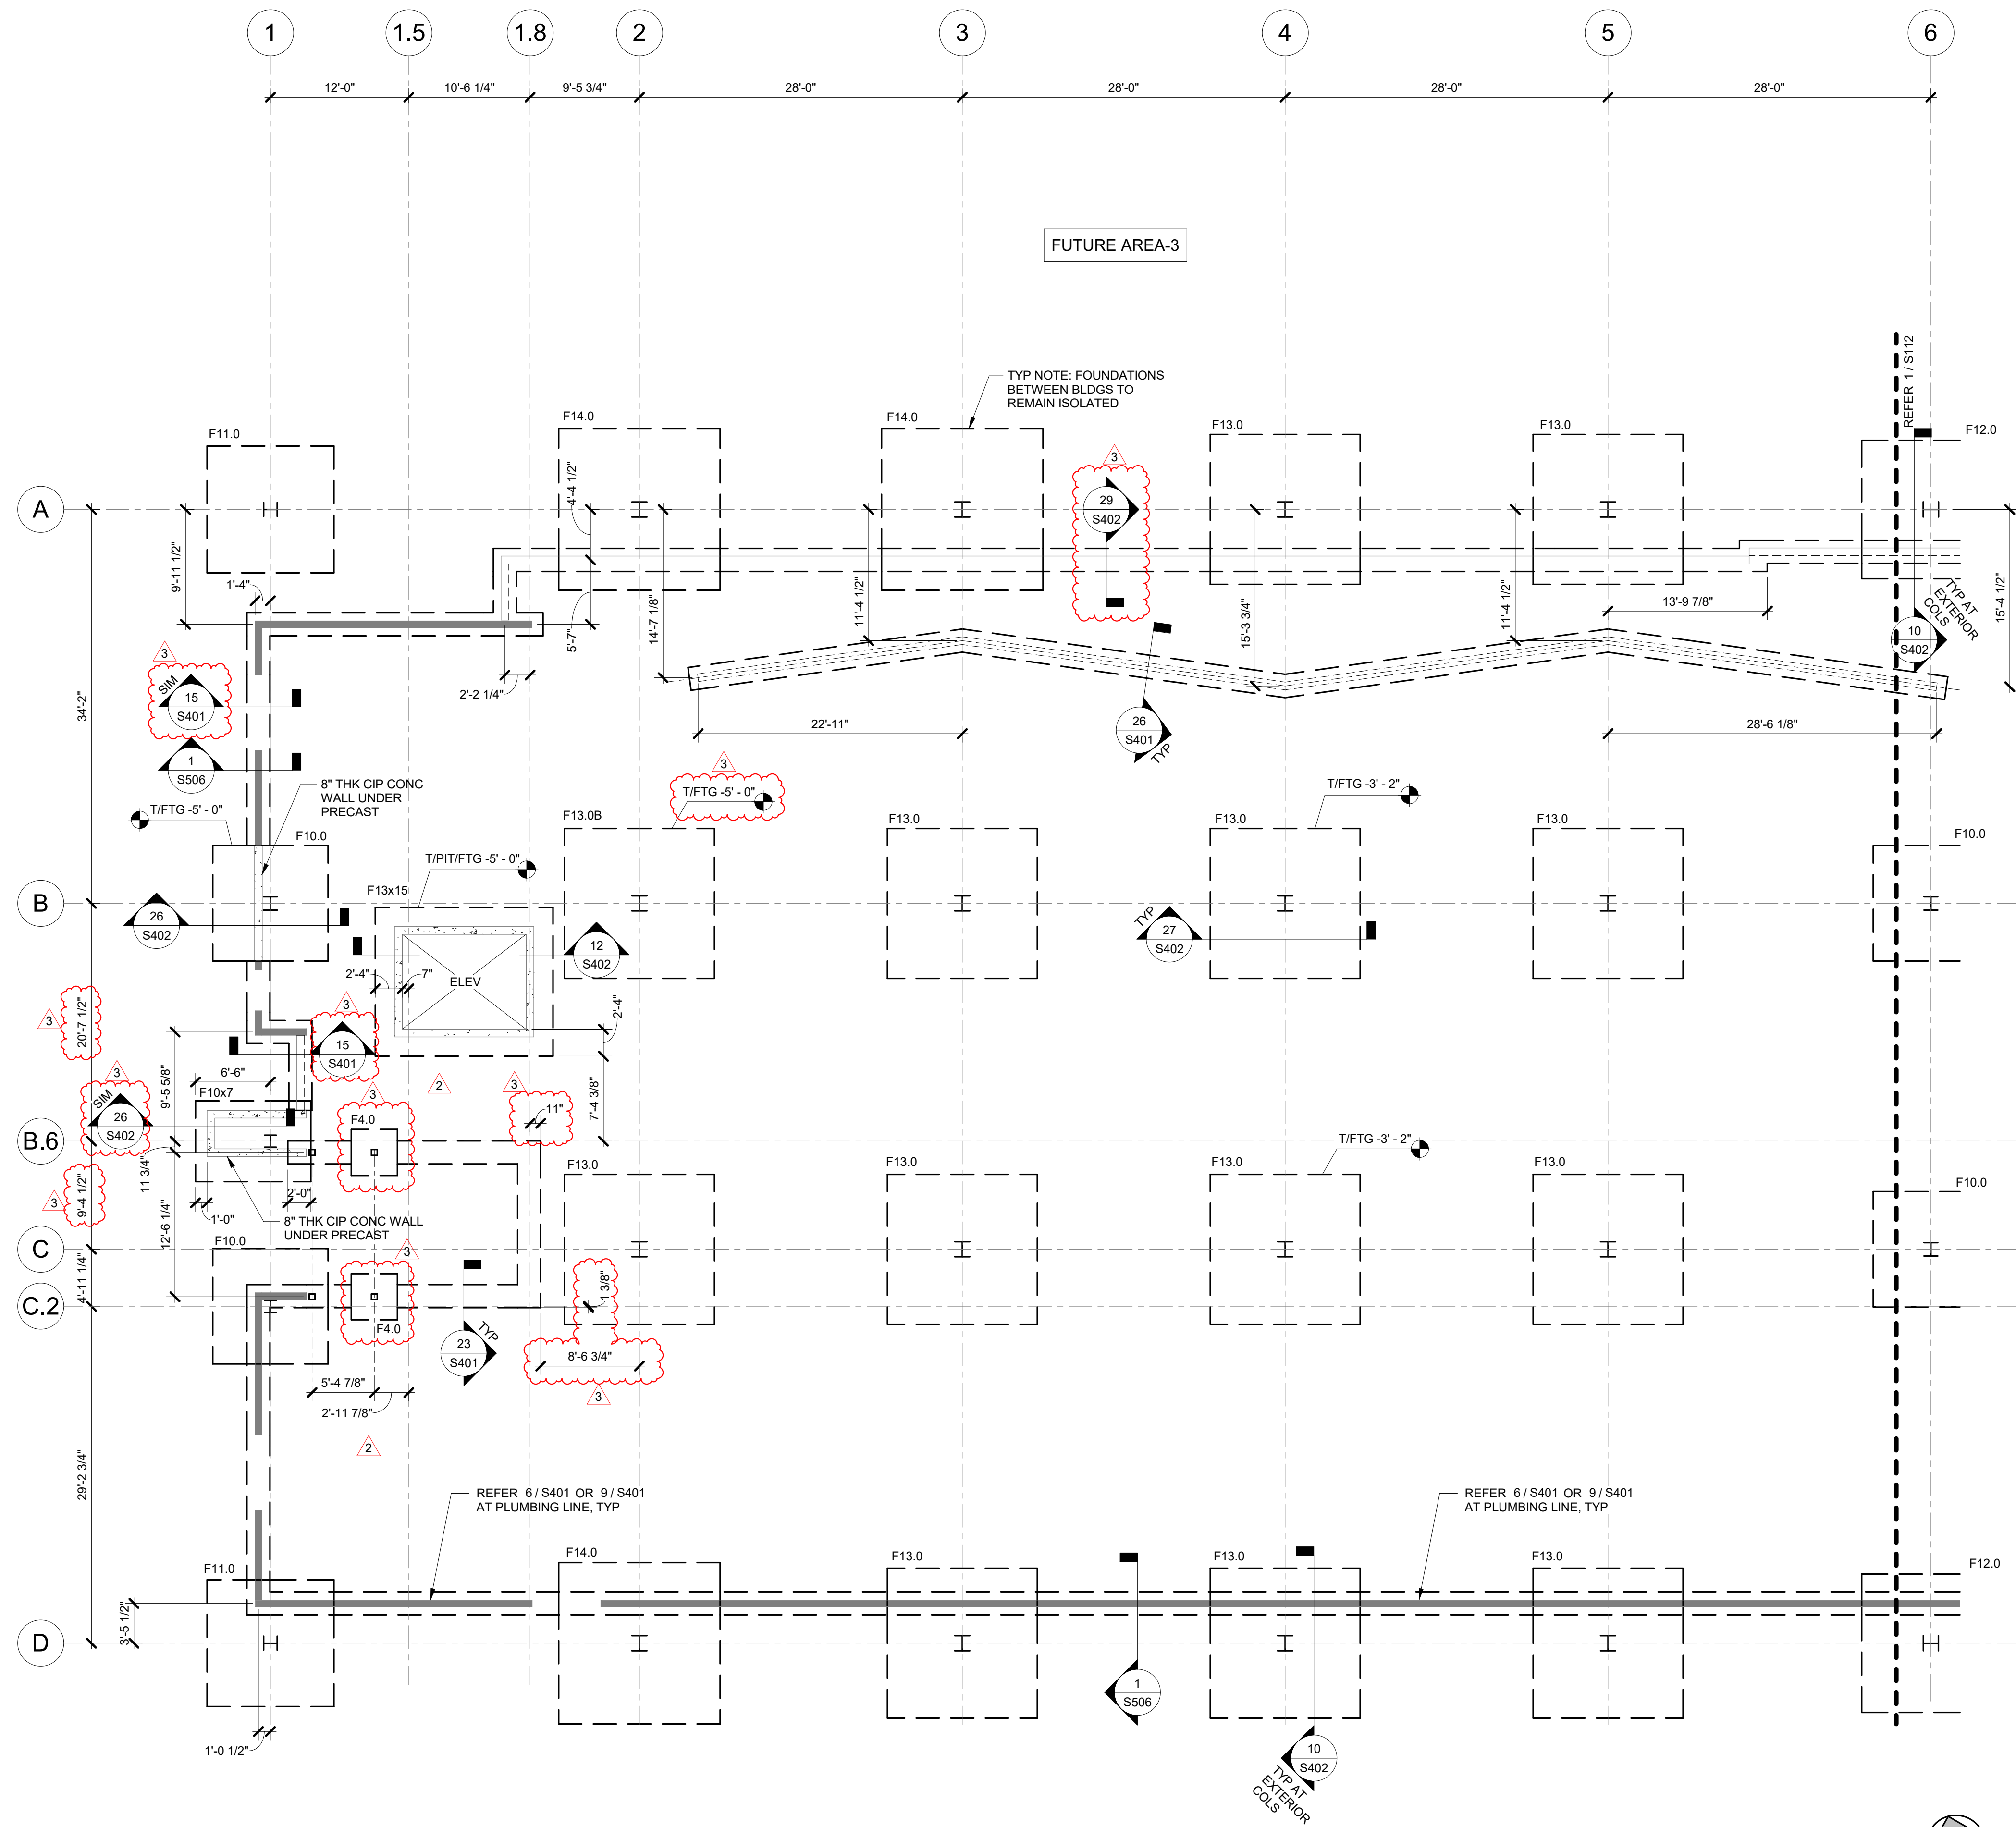

1 FOUNDATION PLAN AREA 1
1/8" = 1'-0"

AREA 1&2 FOOTING SCHEDULE								
MARK	LENGTH	FTG WIDTH	THICKNESS	BOTTOM REINFORCING LW	BOTTOM REINFORCING SW	TOP REINFORCING LW	TOP REINFORCING SW	COMMENTS
F4.0	4'-0"	4'-0"	2'-0"	(4)#5	(4)#5	-	-	
F7.0	7'-0"	7'-0"	2'-0"	(7)#7	(7)#7	-	-	
F8.0	8'-0"	8'-0"	2'-0"	(8)#7	(8)#7	-	-	
F9.0	9'-0"	9'-0"	2'-0"	(9)#7	(9)#7	-	-	
F10.0	10'-0"	10'-0"	2'-6"	(10)#7	(10)#7	-	-	
F10X7	10'-0"	7'-0"	2'-0"	(7)#7	(9)#7	-	-	
F11.0	11'-0"	11'-0"	2'-6"	(11)#8	(11)#8	-	-	
F12.0	12'-0"	12'-0"	2'-6"	(12)#8	(12)#8	(12)#5	(12)#5	
F13.0	13'-0"	13'-0"	3'-0"	(13)#9	(13)#5	(13)#5	(13)#5	
F13.0B	13'-0"	13'-0"	3'-6"	(13)#9	(13)#5	(13)#5	(13)#5	
F13X15	15'-5"	12'-11"	2'-0"	-	-	-	-	SEE SECTION 12/S402
F14.0	14'-0"	14'-0"	3'-0"	(14)#9	(14)#5	(14)#5	(14)#5	
MF-1	-	-	-	-	-	-	-	SEE DETAIL 5/S201


AREA 1 & 2:
ALL FOOTINGS TO BE IMPROVED WITH VIBRO REPLACEMENT STONE COLUMNS. FOOTINGS DESIGNED FOR 5,000 PSF ALLOWABLE SOIL BEARING PRESSURE.

NOTE:
DO NOT USE STRUCTURAL DRAWINGS ALONE FOR BUILDING LAYOUT. DO NOT SCALE THESE DRAWINGS, MANUALLY OR ELECTRONICALLY. COORDINATE THE LOCATIONS OF ALL STRUCTURAL ELEMENTS, INCLUDING COLUMNS, WALLS, SLAB EDGES, DEPRESSIONS AND OPENINGS, WITH THE ARCHITECTURAL DRAWINGS. RESOLVE ANY CONFLICTS PRIOR TO COMMENCING BUILDING LAYOUT. A REGISTERED SURVEYOR SHALL PERFORM BUILDING LAYOUT AND ESTABLISH THE LOCATION OF ALL STRUCTURAL ELEMENTS AT ALL LEVELS.

STRUCTURAL ALTERNATES
DEDUCT ALTERNATE #1: PROVIDE DEDUCT PRICING FOR THE REMOVAL OF THE ONE-STORY PORTION OF THE BUILDING (AREA 3) FROM THE SCOPE OF WORK. THE RESULTING OPENING SHALL BE ENCLOSED WITH CURTAIN WALL FRAMING TO MAINTAIN BUILDING CONTINUITY. DESIGNED BY DELEGATE ENGINEER. REFER TO DETAIL 15 / S401 FOR REQUIRED TURNDOWN SLAB AND NEW FOUNDATION DETAILS AT NEW CURTAIN WALL.
DEDUCT ALTERNATE #2: PROVIDE DEDUCT PRICING FOR THE SUBSTITUTION OF VERTICAL COATED ALUMINUM SUNSHADES IN PLACE OF THE ARCHITECTURALLY SPECIFIED VERTICAL COLORED GLASS PANELS. ENSURE STRUCTURAL INTEGRATION WITH THE CURTAIN WALL SYSTEM AND COORDINATE WITH ALL RELATED DETAILS WITH DELEGATE ENGINEER, PER DETAIL 15 / S401.
THE ONE- AND FOUR-STORY BUILDINGS ARE STRUCTURALLY INDEPENDENT.

LEGEND:
WF# AND F# DENOTES CONCRETE FOOTING TYPE, SEE THIS SHEET FOR FOOTING SCHEDULE

- FOUNDATION PLAN NOTES:**
- SEE SHEETS S001 THROUGH S010 FOR STRUCTURAL NOTES AND DESIGN CRITERIA.
 - TOP OF GROUND FLOOR SLAB = 0'-0" REFERENCE ELEVATION UNLESS NOTED OTHERWISE. VERIFY WITH CIVIL AND ARCHITECTURAL DRAWINGS.
 - TOP OF COLUMN FOOTING ELEVATIONS = -2'-6" UNO.
TOP OF WALL FOOTING ELEVATIONS = -1'-4" UNO
 - SHALLOW FOUNDATION DESIGN IS BASED ON AN ALLOWABLE BEARING PRESSURE AND SUB-GRADE MODULUS AS STATED IN THE GENERAL NOTES SECTION 2011 FOUNDATIONS ON APPROVED SOILS / SUBGRADE PER THE GEOTECHNICAL REPORT AS REFERENCED ON THE GENERAL NOTES SHEET. REFER TO SAID REPORT FOR SOIL IMPROVEMENT AND PREPARATION.
 - VERIFY ALL DIMENSIONS AND ELEVATIONS WITH ARCHITECTURAL DRAWINGS BEFORE COMMENCING CONSTRUCTION. FOR ADDITIONAL DIMENSIONAL INFORMATION, SEE ADJACENT AREAS SEPARATED BY MATCH LINES AND ARCHITECTURAL DRAWINGS.
 - SEE ARCHITECTURAL AND MEP/PICIVIL DRAWINGS FOR SLAB ON GRADE PENETRATIONS AND ADDITIONAL INFORMATION. ANY UNDERGROUND OR ABOVE GROUND MEP/PICIVIL UNITS/LINES ARE DIAGRAMMATIC AND SHOWN HEREIN FOR COORDINATION PURPOSES ONLY. CONTRACTOR SHALL VERIFY ALL ACTUAL LOCATIONS, ELEVATIONS AND SIZES WITH RESPECTIVE DISCIPLINE EOR PRIOR TO CONSTRUCTION.
 - CENTERLINES OF COLUMNS AND BEAMS SHALL COINCIDE WITH THE FOUNDATION CENTERLINES, UNLESS OTHERWISE NOTED.
 - CONTINUOUS WALL FOOTINGS SHALL EXTEND LENGTH WISE 1/2 THE FOOTING WIDTH BEYOND WALL ENDS.
 - SEE 5 / S401 FOR REINFORCING AT FOOTING CORNERS AND INTERSECTIONS.
 - STEP TOP OF CONTINUOUS WALL FOOTINGS AS NECESSARY FOR PIPES OR CONDUIT, SEE 6 / S401.
 - SEE SHEET S202 & S203 FOR COLUMN SCHEDULES.
 - SEE ARCHITECTURAL DRAWINGS FOR FINISHES AND ADDITIONAL INFORMATION.

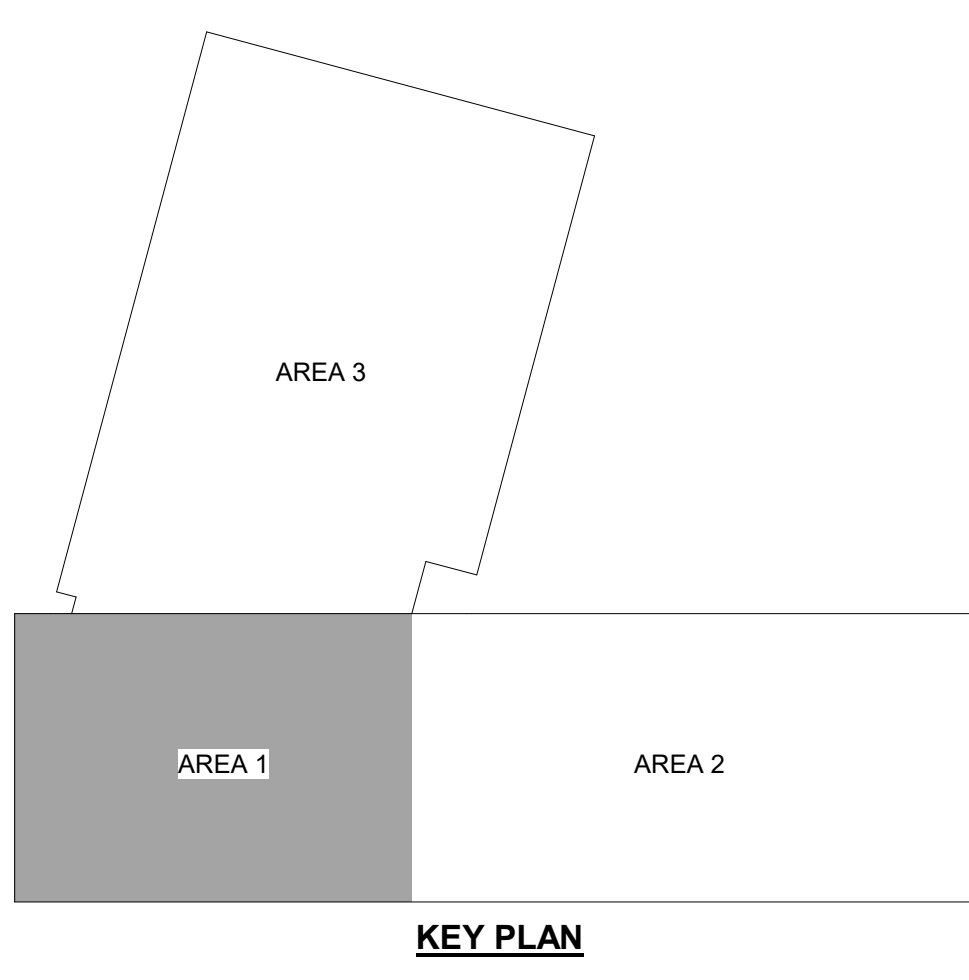


RG ARCHITECTS P.A.
2070 McGregor Boulevard, Suite 1
Fort Myers, FL 33901
P (239) 332-2040
F (239) 332-2049
www.rgarchitectspa.com

PROJECT TEAM



Certificate of Authorization No. 35926
TO THE BEST OF MY KNOWLEDGE AND ABILITY, THE COMPLETED STRUCTURE DEPICTED ON THESE PLANS COMPLIES WITH THE APPLICABLE MINIMUM BUILDING CODES.
FILE No. 25FTM200

SEAL

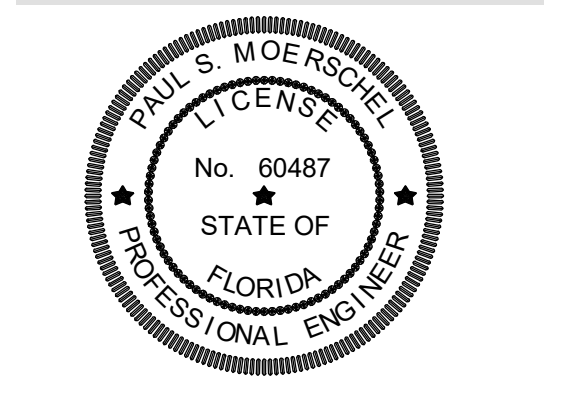

OWNER



PROJECT TITLE
FGCU ACADEMIC BUILDING 10

PROJECT ADDRESS

10519 FGCU BLVD. S
FORT MYERS FL, 33965

REVISIONS

NO.	DESCRIPTION	DATE
3	100% CONSTRUCTION DOCUMENTS	03.30.2026
2	90% CONSTRUCTION DOCUMENTS	02.13.2026
1	ERP ADDENDUM 01	11.21.2025

Received
4-3-2026
E&H Steel

DATE ISSUED: 03.30.2026
REVIEWED BY: JCL/PSM
DRAWN BY: SEG
PROJECT NUMBER: 25FTM200

FOUNDATION PLAN AREA 1

S111

100% CONSTRUCTION DOCUMENTS