



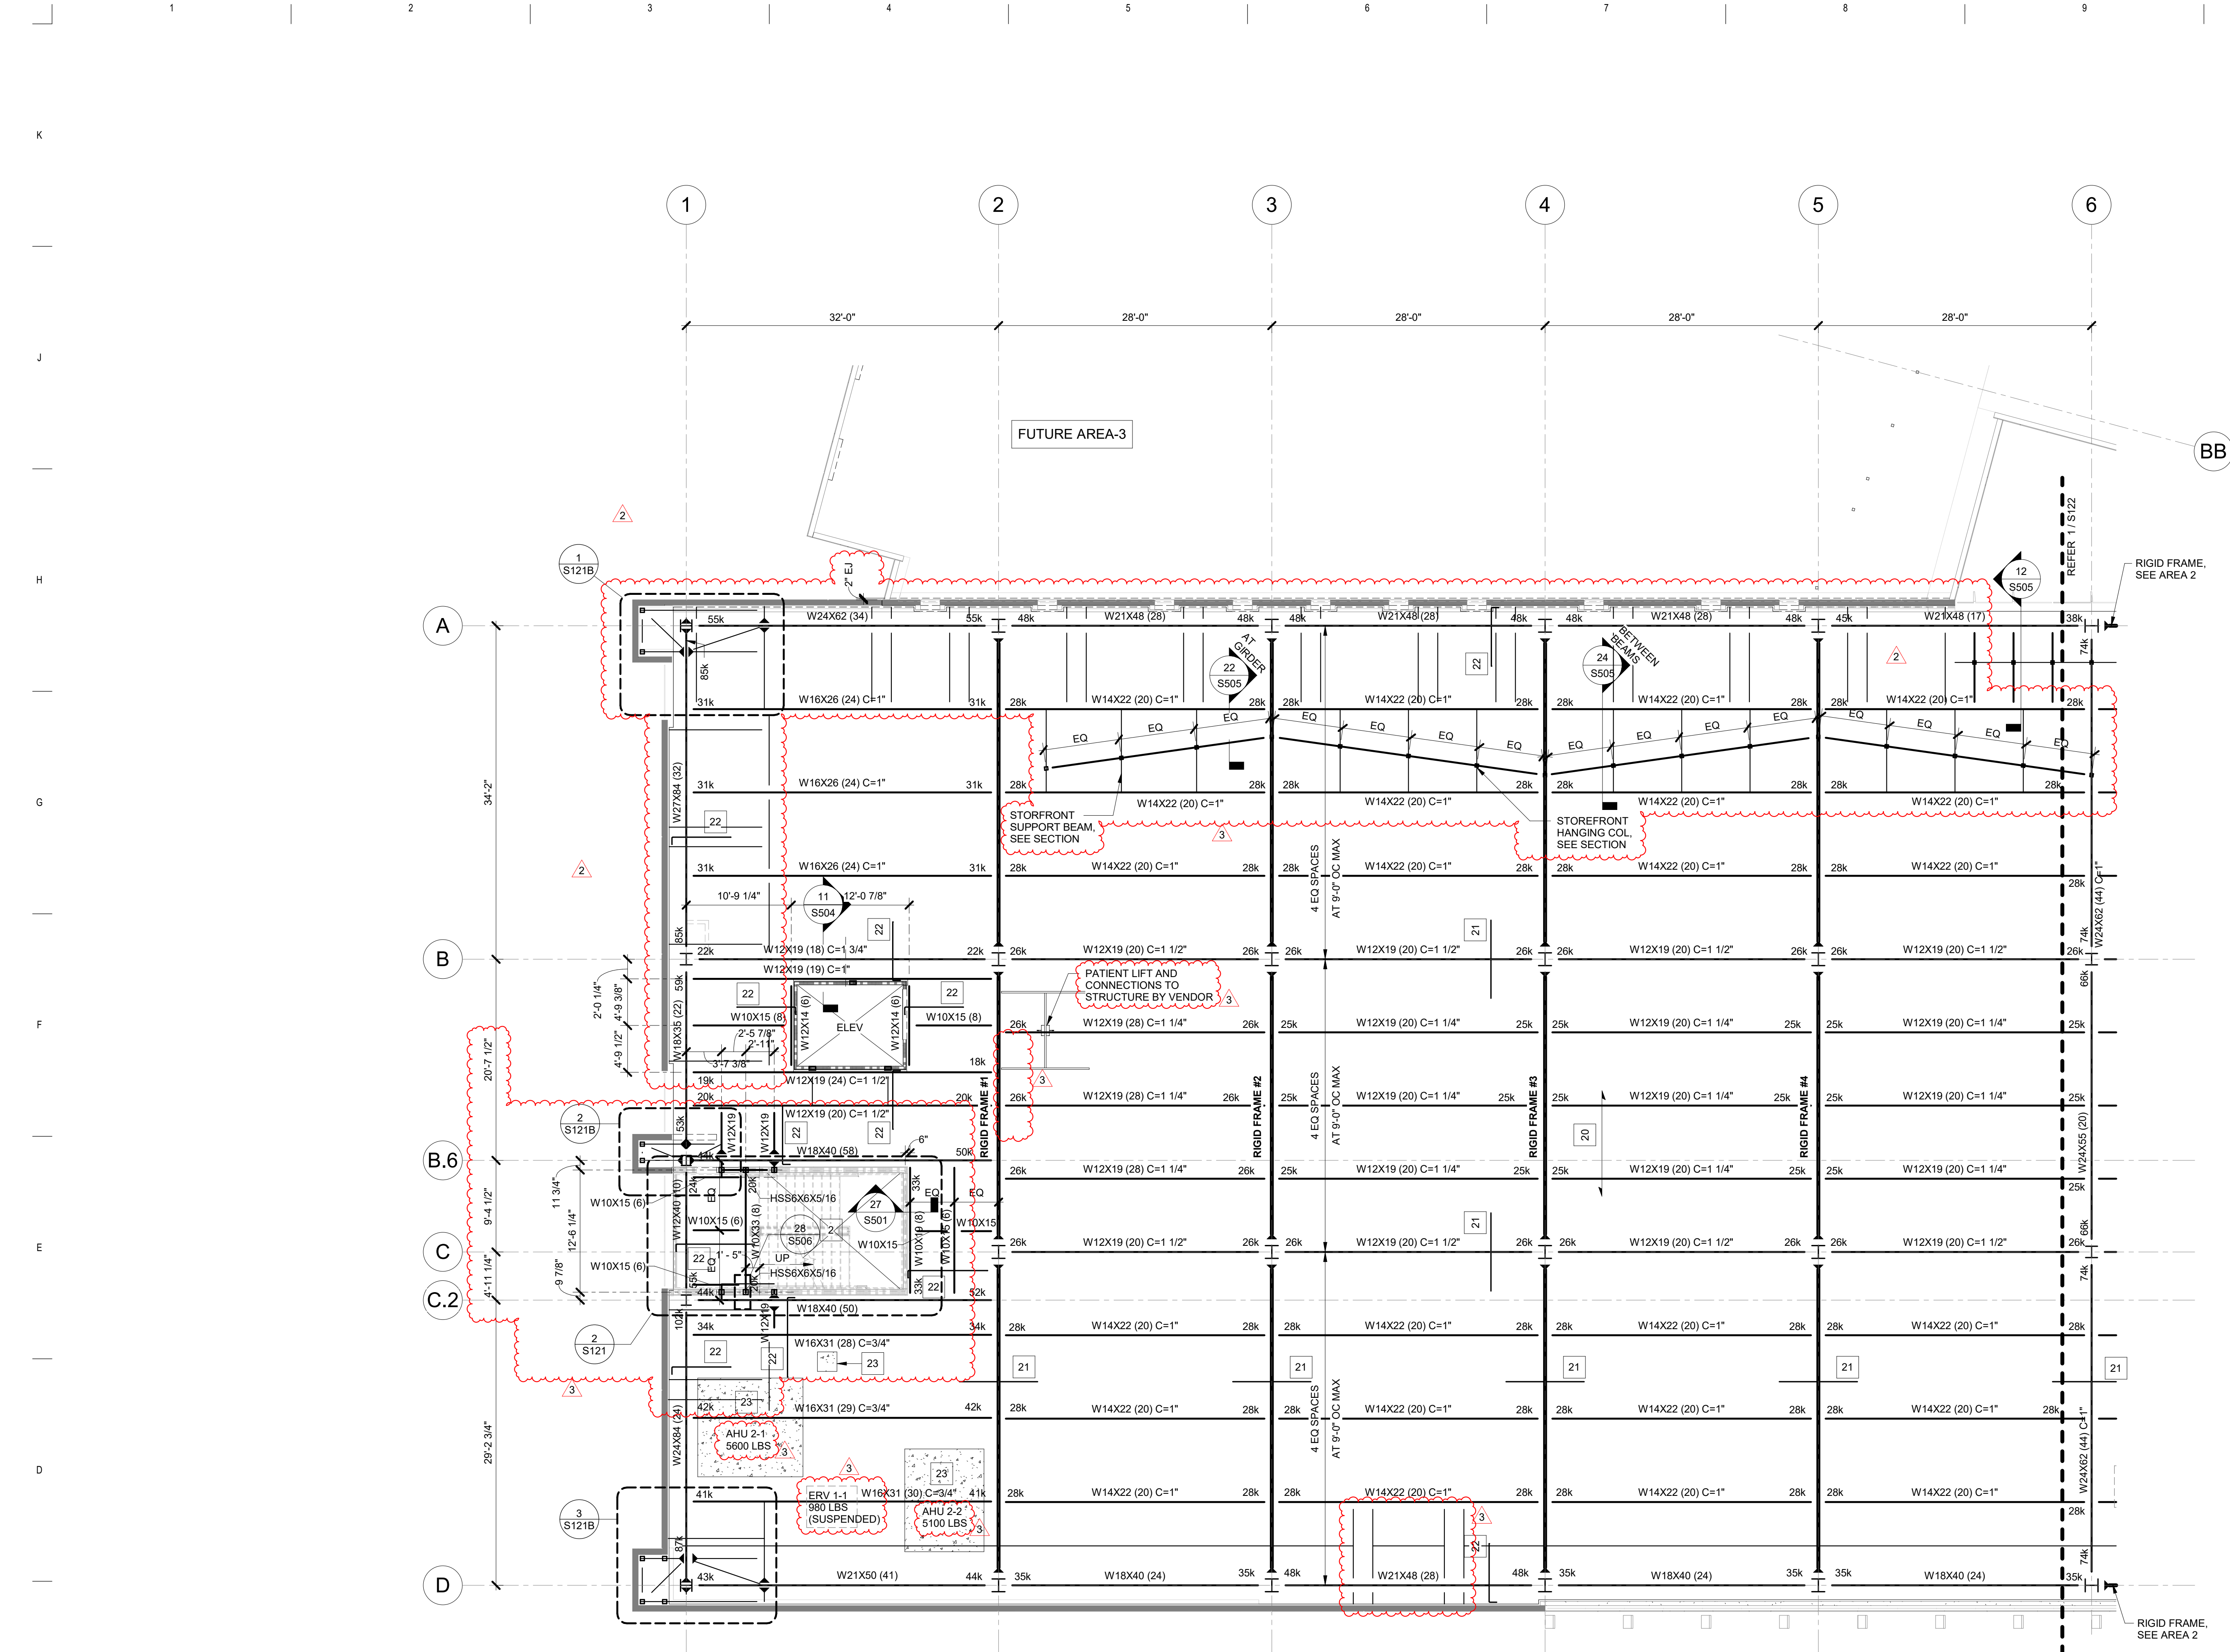

- PLAN NOTES:**
- ELEVATIONS ARE BASED ON A TOP OF GROUND FLOOR SLAB REFERENCE ELEVATION 0'-0".
 - SEE SHEETS S001 THROUGH S010 FOR STRUCTURAL NOTES AND DESIGN CRITERIA.
 - VERIFY ALL DIMENSIONS, ELEVATIONS, SLOPES AND FINISHES WITH ARCHITECTURAL DRAWINGS PRIOR TO CONSTRUCTION. ALL DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT OF RECORD AND THE STRUCTURAL ENGINEER OF RECORD.
 - INDICATES SPAN DIRECTION OF STRUCTURAL DECK. SEE NOTES ON THIS SHEET FOR DECK SPECIFICATIONS.
 - DENOTES MOMENT CONNECTION. DESIGN MOMENT CONNECTION FOR FULL MOMENT AND SHEAR CAPACITY OF BEAM UNO.
 - SEE 26 / S501 FOR COMPOSITE SLAB REINFORCING AT COLUMN LINES AND EDGE OF SLAB.
 - "EOS" DENOTES EDGE OF SLAB.
 - REFER TO BEAM LEGENDS ON THIS SHEET FOR COMPOSITE AND NON-COMPOSITE BEAM DETAILS.
 - REFER TO STRUCTURAL NOTES AND PROJECT SPECIFICATIONS FOR DEFINITION OF SYMBOLS, ABBREVIATIONS AND OTHER INFORMATION AND CRITERIA NOT SHOWN ON PLAN.
 - LOADING CRITERIA IS DEFINED ON THE LOADING DIAGRAMS. NOTIFY STRUCTURAL ENGINEER OF RECORD OF SPECIAL ROOF/CEILING LOADING CONDITIONS NOT OTHERWISE IDENTIFIED ON THE CONTRACT DOCUMENTS.
 - FRAMING SHALL BE EQUALLY SPACED BETWEEN COLUMN BAYS UNLESS NOTED OTHERWISE OR DIMENSIONED ON PLAN.
 - COORDINATE FINAL SIZE AND LOCATION OF ROOF OPENINGS, PENETRATIONS AND CHASES WITH ARCHITECTURAL AND MEP/FP DRAWINGS.
 - DIMENSIONS TO FLOOR AND CEILING MOUNTED EQUIPMENT ARE APPROXIMATE AND SHALL BE VERIFIED BY THE CONTRACTOR PRIOR TO FABRICATION AND UPON FINAL SELECTION OF EQUIPMENT AND CURBING. IF ANY EQUIPMENT CHANGES LOCATION, SIZE AND/OR WEIGHT, IT IS THE RESPONSIBILITY OF THE GC TO NOTIFY THE STRUCTURAL ENGINEER OF RECORD. TRC RESERVES THE RIGHT TO REDESIGN THE FLOOR STRUCTURE IN THE EVENT OF SUCH A CHANGE. ALL HOUSEKEEPING PADS ARE TO BE UPDATED BASED ON SUCH CHANGES.
 - ALL CONNECTIONS, WHERE REACTIONS/FORCES HAVE BEEN PROVIDED, SHALL BE DESIGNED BY A DELEGATE ENGINEER. DETAILS THAT SHOW WELDS SIZES, BOLTS, PLATE THICKNESSES ARE TO BE CONSIDERED AS MINIMUM SIZES, AND AS SUCH ARE NOT FULLY DETAILED.
 - SEE 24 / S501 FOR COMPOSITE SLAB CONSTRUCTION JOINT DETAIL.

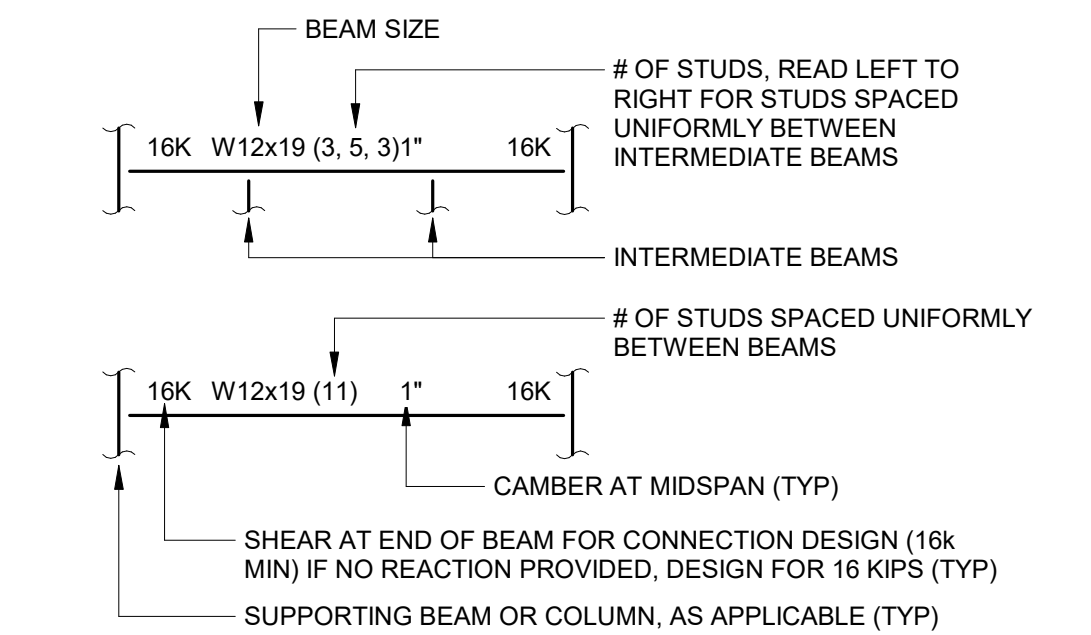

- NOTES:**
- STUD SIZE PER TYPICAL DETAIL.
 - SEE 6 / S501 FOR STUD PLACEMENT.
 - WHERE # OF STUDS ARE NOT INDICATED, BEAM IS NON-COMPOSITE.

NOTE:
DO NOT USE STRUCTURAL DRAWINGS ALONE FOR BUILDING LAYOUT. DO NOT SCALE THESE DRAWINGS, MANUALLY OR ELECTRONICALLY. COORDINATE THE LOCATIONS OF ALL STRUCTURAL ELEMENTS, INCLUDING COLUMNS, WALLS, SLAB EDGES, DEPRESSIONS AND OPENINGS, WITH THE ARCHITECTURAL DRAWINGS. RESOLVE ANY CONFLICTS PRIOR TO COMMENCING BUILDING LAYOUT. A REGISTERED SURVEYOR SHALL PERFORM BUILDING LAYOUT AND ESTABLISH THE LOCATION OF ALL STRUCTURAL ELEMENTS AT ALL LEVELS.


STRUCTURAL ALTERNATES

DEDUCT ALTERNATE #1: PROVIDE DEDUCT PRICING FOR THE REMOVAL OF THE ONE-STORY PORTION OF THE BUILDING (AREA 3) FROM THE SCOPE OF WORK. THE RESULTING OPENING SHALL BE ENCLOSED WITH CURTAIN WALL FRAMING TO MAINTAIN BUILDING CONTINUITY. DESIGNED BY DELEGATE ENGINEER. REFER TO DETAIL 15 / S401 FOR REQUIRED TURNDOWN SLAB AND NEW FOUNDATION DETAILS AT NEW CURTAIN WALL.


THE ONE- AND FOUR-STORY BUILDINGS ARE STRUCTURALLY INDEPENDENT.

DEDUCT ALTERNATE #2: PROVIDE DEDUCT PRICING FOR THE SUBSTITUTION OF VERTICAL COATED ALUMINUM SUNSHADES IN PLACE OF THE ARCHITECTURALLY SPECIFIED VERTICAL COLORED GLASS PANELS. ENSURE STRUCTURAL INTEGRATION WITH THE CURTAIN WALL SYSTEM AND COORDINATE WITH ALL RELATED DETAILS WITH DELEGATE ENGINEER, PER DETAIL 15 / S401.

SECOND FLOOR FRAMING PLAN AREA-1
1/8" = 1'-0"
T/SLAB = 19'-6 1/2" UNO

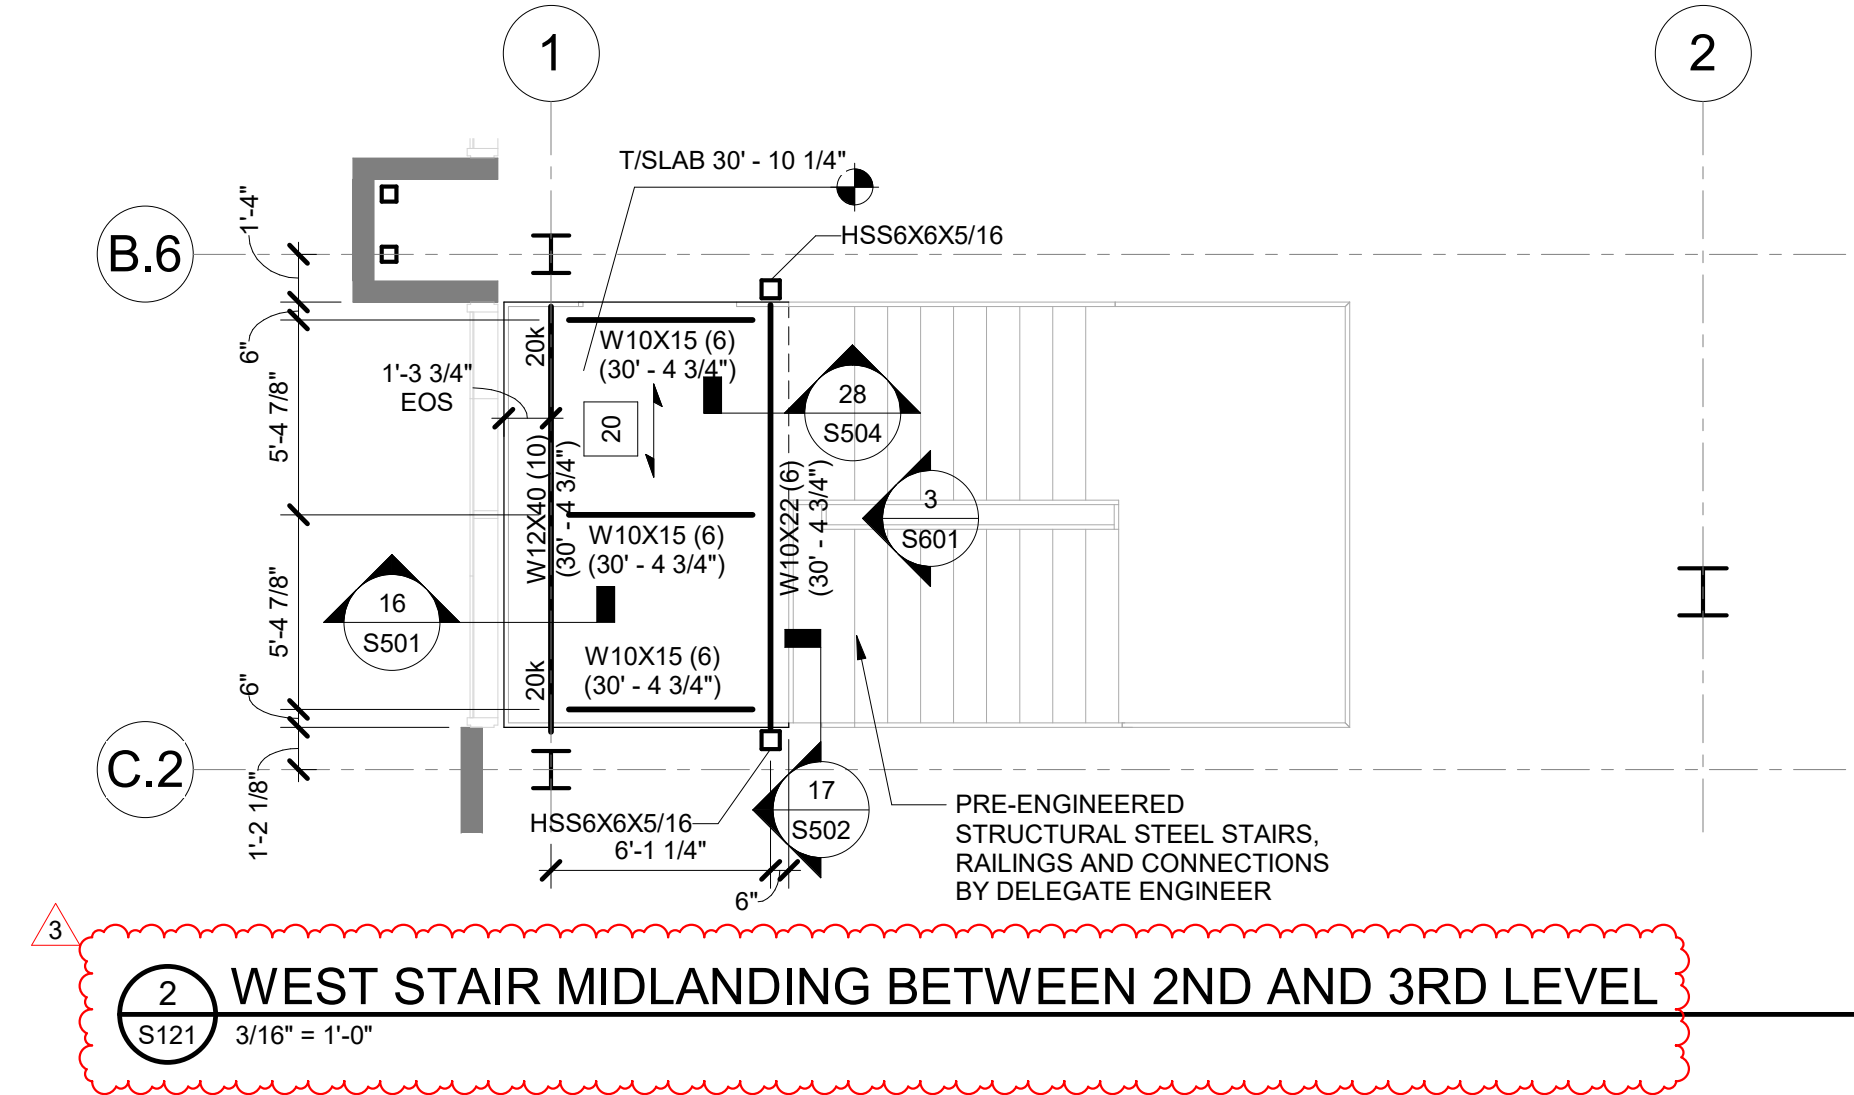

KEYNOTES	
Key	DESCRIPTION
2	PRE-ENGINEERED STEEL STAIRS, RAILINGS AND CONNECTIONS TO STRUCTURE BY DELEGATE ENGINEER.
20	3 1/2" NORMAL WEIGHT CONCRETE ON 2" (2 GAGE) COMPOSITE DECK, 2VLI BY VULCRAFT (5 1/2" TOTAL THICKNESS) WITH 66-W2, 1WV2, 1WVR (IN SHEETS NOT ROLLS) CHAINED TO TOP OF SLAB. SHORE DECK IF LESS THAN (3) CONTINUOUS SPANS AND IN ACCORDANCE W/ MAX SDI UNSHORED CLEAR SPAN PUBLISHED BY MANUFACTURER UNTIL CONCRETE HAS REACHED 75% OF COMPRESSIVE STRENGTH. SEE SHEET S501 FOR DETAILS.
21	#4x8'-0" @ 12" OC, CENTER OVER BEAM AT ALL GRID LINES AND OVER GIRDERS.
22	#4x6'-0" @ 12" OC W/ 90° HOOK AT ALL EXTERIOR SLAB EDGES.
23	6" THICK MEP HOUSEKEEPING PAD, SEE MEP FOR SIZE & LOCATION. SEE 21/S501 FOR ADDITIONAL INFORMATION.

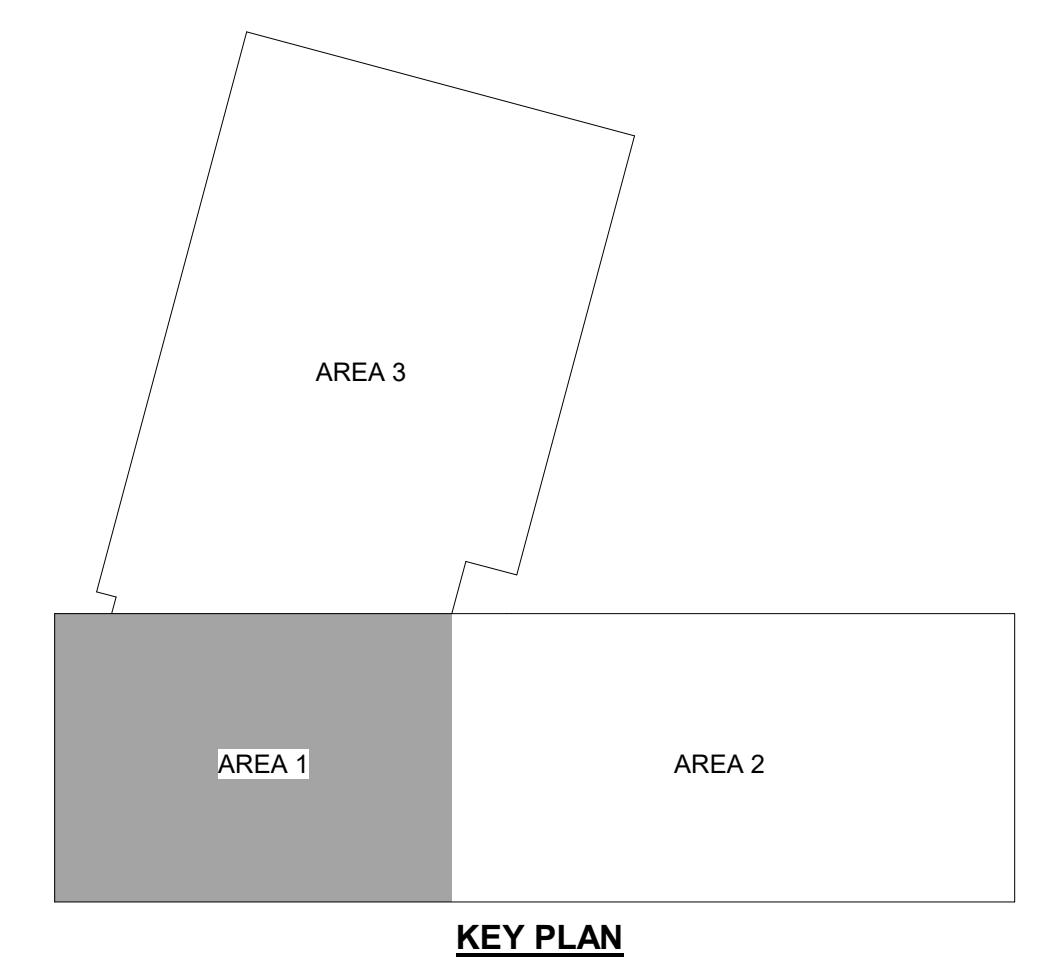

RG ARCHITECTS P.A.
2070 McGregor Boulevard, Suite 1
Fort Myers, FL 33901
P (239) 332-2040
F (239) 332-2049
www.rgarchitectspa.com

PROJECT TEAM

Hunton Brady
ARCHITECTS

TRC
WORLDWIDE ENGINEERING
11526 Fairway Lakes Drive
FORT MYERS, FL 33913
PHONE: (239) 939-1414
FAX: (239) 278-4289
© 2025 TRC Worldwide Engineering
All rights reserved
www.trc.com

Certificate of Authorization No. 35926
TO THE BEST OF MY KNOWLEDGE AND
ABILITY, THE COMPLETED STRUCTURE
DEPICTED ON THESE PLANS COMPLIES
WITH THE APPLICABLE MINIMUM
BUILDING CODES.
FILE No. 25FTM200

SEAL

OWNER

Florida Gulf Coast University

PROJECT TITLE

FGCU ACADEMIC BUILDING 10

PROJECT ADDRESS

10519 FGCU BLVD. S
FORT MYERS FL, 33965

REVISIONS

NO.	DESCRIPTION	DATE
3	100% CONSTRUCTION DOCUMENTS	03.30.2025
2	90% CONSTRUCTION DOCUMENTS	02.13.2025

Received
4-3-2026
E&H Steel

DATE ISSUED: 03.30.2025
REVIEWED BY: JCL/PSM
DRAWN BY: SEG
PROJECT NUMBER: 25FTM200

SECOND FLOOR FRAMING
PLAN AREA 1

S121

100% CONSTRUCTION DOCUMENTS